


Power chord



Machine Label

Gas Inputs

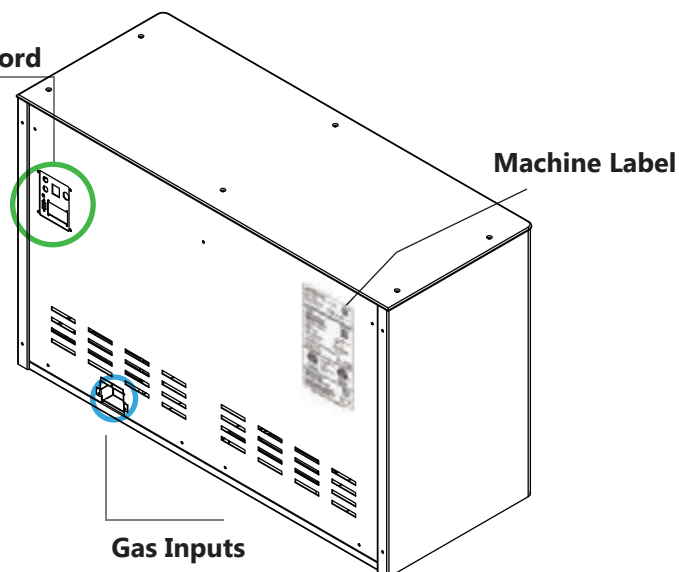

SERVICE TEMPERATURES

Fully independent zones ranging from 6°C to 22°C.



DOSAGES

Up to three different dosage through high quality mechanical buttons.



BOTTLES LIFTING SYSTEM

Lifting system with manual gas spring pistons.



REFRIGERATION SYSTEM

Use of modern no-frost, noiseless professional cooling system.




GAS

Nitrogen or food grade Argon (cylinder or generator not included).



CUSTOMIZATIONS

Machine color can be customized, Front panel can be silkscreened*



LED ILLUMINATION

Intelligent led system with power saving features.



LOCKING SYSTEM

Automatic lock activated by Menu button



ANTI CONDENSATION GLASS



Glass doors are treated with a special coating that prevents condensation .

*Optional

*Optional

SPACE REQUIREMENTS

DIMENSIONS

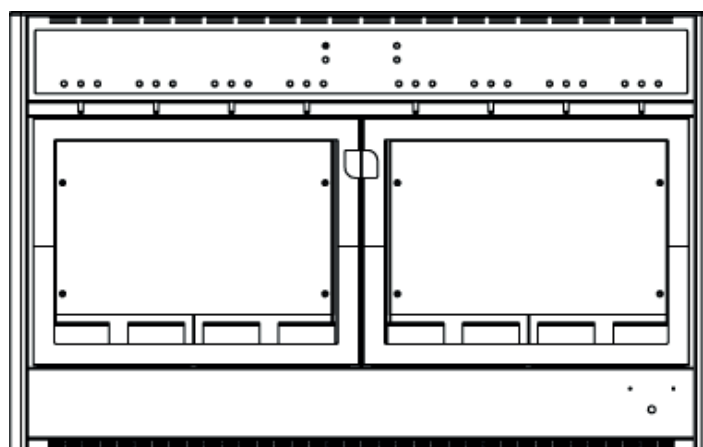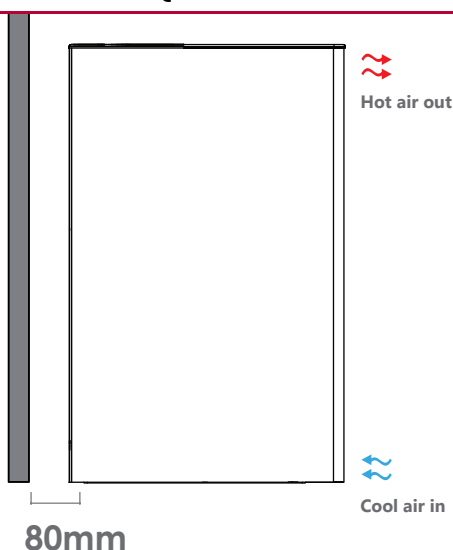


WIDTH	1008mm 39 11/16"
HEIGHT	632mm 24 7/8"
DEPTH	398mm 15 11/16"
WEIGHT	83kg 183lbs



Proximity Sensor



Temperature Combinations

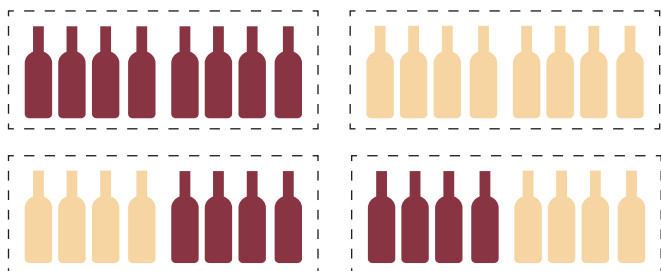

CERTIFICATIONS

USA & CANADA 110VAC 60Hz

NSF 25
UL 751
UL 541
CSA C22.2 #128



EUROPE & WORLD 220VAC 50Hz

NSF 25
IEC 60335-1
IEC 60335-2-75
IEC 60335-2-24

