



USE AND ACTIVATION SYSTEM

Dispenser works in behind the bar mode (no wine card) or self service with wine card (chip or RFID) or barcode reader*.



SERVICE TEMPERATURES

Fully independent zones ranging from 6°C to 22°C.



DOSAGES

Up to three different dosage through high quality mechanical buttons.



SOFTWARE CONNECTION

Connection between modules and software through LAN wire and WI/FI* with TCP/IP protocol.



BOTTLES LIFTING SYSTEM

Cool air in

Lifting system with pneumatic pistons.



WINE CARD

Chip or RFID cards.



REFRIGERATION SYSTEM

Use of modern no-frost, noiseless professional cooling system.



GAS

Nitrogen or food grade Argon (cylinder or generator not included).



CUSTOMIZATIONS

Machine color can be customized. Front panel can be silkscreened*



LED ILLUMINATION

Intelligent led RGB system for an infinite variety of color combinations.



LOCKING SYSTEM

Automatic lock activated by Smart Card or RFID.




ANTI CONDENSATION GLASS

Glass doors are treated with a special coating that prevents condensation.

*Optional

SPACE REQUIREMENTS

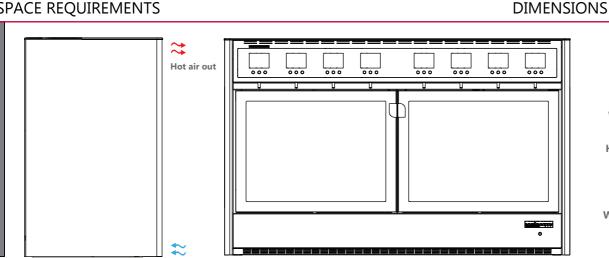

WIDTH	1008mm 39 ¹¹ / ₁₆ "
HEIGHT	632mm 24 ⁷ / ₈ "
DEPTH	398mm 15 ¹¹ / ₁₆ "
WEIGHT	83kg 183lbs





DUAL TEMPERATURE





WINE JAMOTION wine dispensing system

RFID and chip Card Reader



Proximity Sensor



Temperature Combinations





CERTIFICATIONS

USA & CANADA 110VAC 60Hz

NSF 25 UL 751 UL 541 CSA C22.2 #128





EUROPE & WORLD 220VAC 50Hz

NSF 25 IEC 60335-1 **IEC 60335-2-75** IEC 60335-2-24







