


Power chord



Machine Label

Gas Inputs

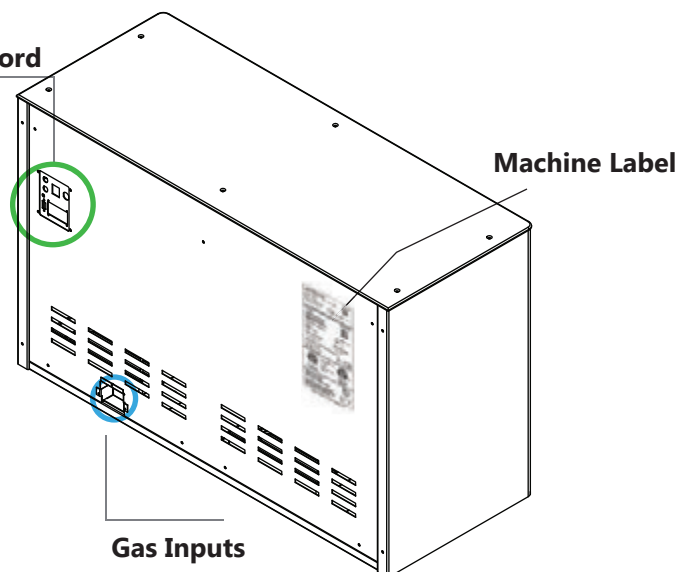

SERVICE TEMPERATURES

Fully independent zones ranging from 6°C to 22°C.



DOSAGES

Up to three different dosage through high quality mechanical buttons.



BOTTLES LIFTING SYSTEM

Lifting system with gas spring pistons.



REFRIGERATION SYSTEM

Use of modern no-frost, noiseless professional cooling system.




GAS

Nitrogen or food grade Argon (cylinder or generator not included).



CUSTOMIZATIONS

Machine color can be customized, Front panel can be silkscreened*



LED ILLUMINATION

Intelligent led RGB system for an infinite variety of color combinations.



LOCKING SYSTEM

Automatic lock activated by Menu button





ANTI CONDENSATION GLASS

Glass doors are treated with a special coating that prevents condensation.

*Optional

SPACE REQUIREMENTS

DIMENSIONS

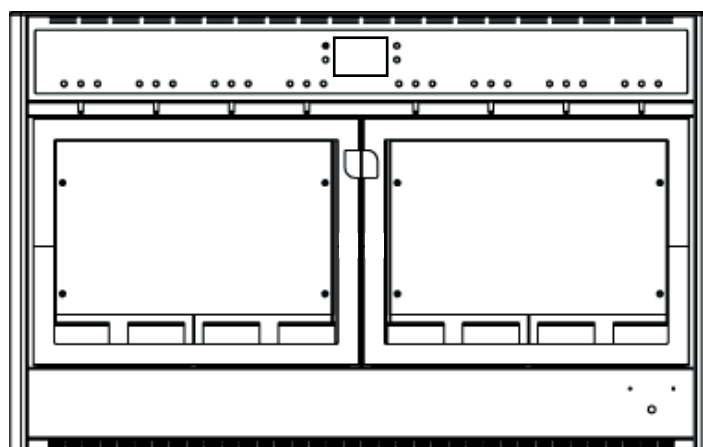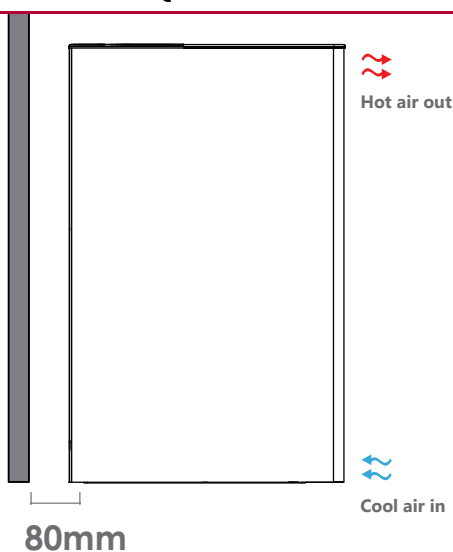

WIDTH	1010mm 39 ³ / ₄ "
HEIGHT	632mm 24 ⁷ / ₈ "
DEPTH	398mm 15 ¹¹ / ₁₆ "
WEIGHT	70kg 154lbs



CERTIFICATIONS

USA & CANADA 110VAC 60Hz

NSF 25
UL 751
UL 541
CSA C22.2 #128



EUROPE & WORLD 220VAC 50Hz

NSF 25
IEC 60335-1
IEC 60335-2-75
IEC 60335-2-24

