

USE AND ACTIVATION SYSTEM

Dispenser works in **behind the bar** mode (no wine card) or self service (with wine card or barcode reader*).



SERVICE TEMPERATURES

Dual zone ranging from 6°C to 22°C.
Without the divider from 15°C to 22°C



DOSAGES

Up to three different dosage through high quality mechanical buttons.



SOFTWARE CONNECTION

Connection between modules and software through LAN wire and WI/FI* with TCP/IP protocol.



BOTTLES LIFTING SYSTEM

Lifting system with pneumatic pistons.



WINE CARD

Chip or RFID* cards.



REFRIGERATION SYSTEM

Use of modern no-frost, noiseless professional cooling system.



GAS

Nitrogen or food grade Argon (cylinder or generator not included).



CUSTOMIZATIONS

Machine color can be customized, Front panel can be silkscreened*



LED ILLUMINATION

Intelligent led RGB system for an infinite variety of color combinations.



LOCKING SYSTEM

Automatic lock activated by Smart Card or RFID*.





ANTI CONDENSATION GLASS

Glass doors are treated with a special coating that prevents condensation .

*Optional

SPACE REQUIREMENTS

DIMENSIONS

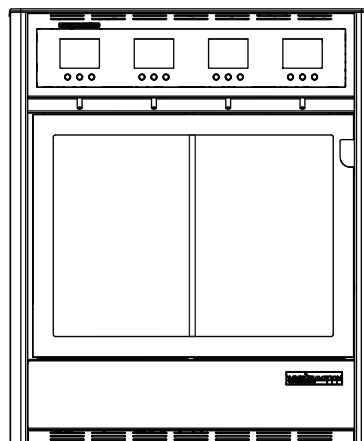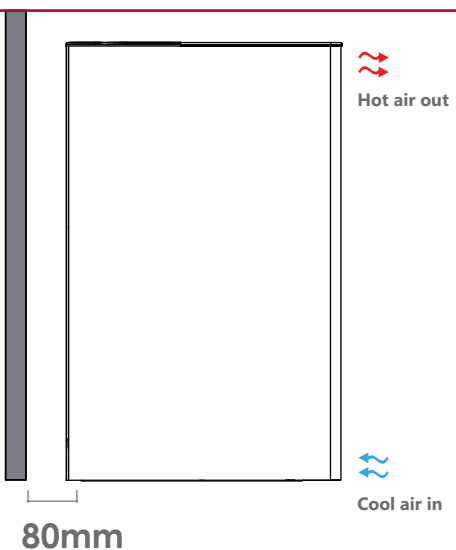

| | |
|---------------|---|
| WIDTH | 528mm 20 ¹³ / ₁₆ " |
| HEIGHT | 632mm 24 ⁷ / ₈ " |
| DEPTH | 398mm 15 ¹¹ / ₁₆ " |
| WEIGHT | 42kg 92.5lbs |



Chip and RFID* Card Reader

Proximity Sensor

Temperature Combinations



CERTIFICATIONS

USA & CANADA 110VAC 60Hz

NSF 25
UL 751
UL 541
CSA C22.2 #128



EUROPE & WORLD 220VAC 50Hz

NSF 25
IEC 60335-1
IEC 60335-2-75
IEC 60335-2-24

